ID-01 DIMENSIONED FLOOR PLAN, CAD CUTAWAY AXONOMETRIC & STORAGE SYSTEM

OPTION A · INCHES + CENTIMETRES

FOOTPRINT (SUPPLIED COORDINATES)	CLEAR WIDTH, CABINET FRONTS	CONCEALED STORAGE (OPT A)	WALK-IN SHOWER	DOUBLE VANITY WALL	PLUMBING STACK MOVES
243.06 sq ft	102"	136.78 ft³	50" × 84"	134" (11'-2")	0"
22.58 m² · 150"×200" + 50"×100" wing	259 cm · door sweeps excluded	3,873 L · S-01 to S-04 internal envelopes	127 × 213 cm · zero threshold, 18" bench	340 cm · 5 bays, 2 full-height towers	WC and vanity drain walls retained

01 OPTION A — PROPOSED DIMENSIONED FLOOR PLAN


Imperial inches + metric centimetres · north up



M-01	50"×16" tankless utility chase; heater sizing and venting by plumber	SH	50"×84" walk-in rain & steam shower, 30" pivot door	TUB	68"×32" zero-step freestanding stone tub in the 70"×50" skylight zone
WC	50"×60" private WC, 28" door opening	S-01	134" five-bay double vanity on the 140" east wall	S-02	West linen, hamper & cleaning wall, 24" deep

02 CAD-EXTRUDED CUTAWAY AXONOMETRIC

Same coordinates as plan 01 · SW light 35°

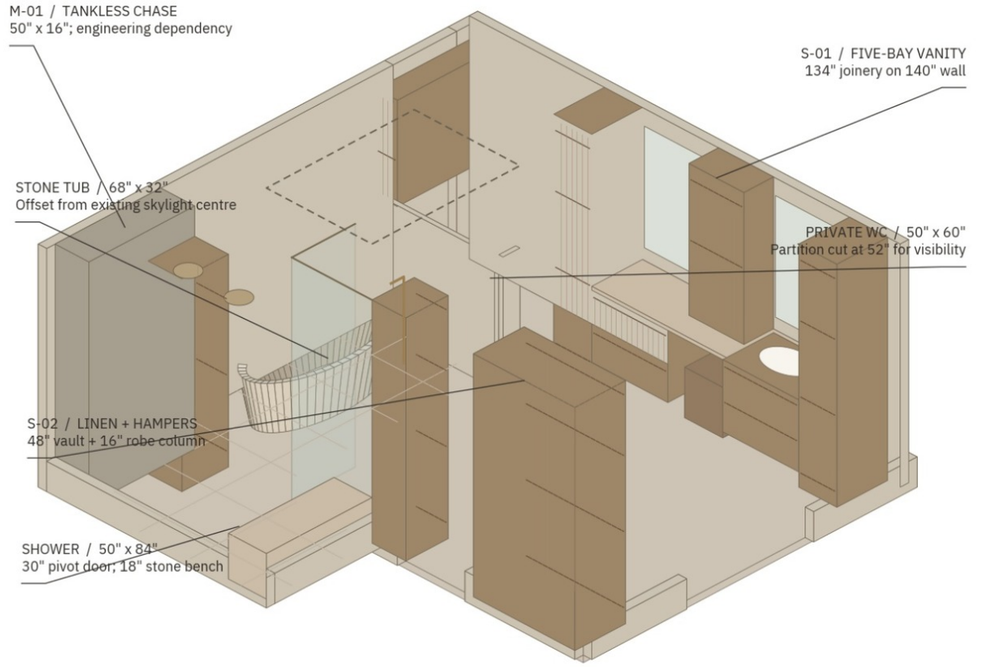

03 STORAGE SCHEDULE — A PLACE FOR EVERY ITEM

136.78 ft³ / 3,873 L

TAG	UNIT, OUTER W×D×H · CONTENTS	FT³	L
S-01A/C	**2× tall vanity towers 18"×24"×96"** Bath towels, skincare, medicine, toiletry backstock	35.85	1,015.2
S-01B	**Grooming tower 26"×14"×60"** Hairdryer, shavers, toothbrushes on internal 120 V GFCI outlets	9.33	264.3
S-01 DR	**4× U-notched drawers 36"×24" bays** Cosmetics, brushes, hair tools, velvet-lined jewellery trays	10.83	306.8
S-02A	**Linen, hamper & utility vault 48"×24"×96"** Folded bath sheets, 2 ventilated hampers, full-height vacuum / mop locker	47.87	1,355.5
S-02B	**Robe & spa column 16"×20"×96"** Hanging robes, slippers, steamer — beside the WIC portal	12.83	363.4
S-03	**Heated towel cabinet 22"×16"×84"** Warm towels within reach of shower and tub (Option A only)	12.31	348.7
S-04	**WC cabinet 46"×10"×42" + 44" shower niche** Spare rolls, hygiene stock; niche holds shower bottles (not counted)	7.74	219.2
TOTAL	**Option A · Option B omits S-03:** 124.46 ft³	136.78	3,873.1

Internal envelopes before shelves, runners and equipment; computed from the plan coordinates. Total uses unrounded values.

PROJECT	DRAWING	SCALE	DATE	REV	SHEET
MASTER BATHROOM RENOVATION (243 SQ FT)	PLAN, 3D AXONOMETRIC & STORAGE SCHEDULE	AS SHOWN — BAR	2026-11-10	A	ID-01

ID-02 COORDINATED 3D ARCHITECTURAL VIEWS & DESIGN EXPLANATION



VIEW 01
CAM A — LOOKING NORTH

Zero-step honed Roman travertine wet zone beneath the existing 70"×50" skylight: 68"×32" matte stone soaking tub and full-width 8"-deep rear stone ledge; at left the 50"×84" bronze-framed glass steam shower with 18"-deep heated stone bench; at right the 134" fluted walnut double vanity.




VIEW 02
CAM B — LOOKING EAST / NORTH-EAST

Fluted American black walnut and honed travertine five-bay double vanity (S-01: S-01C north tower, north basin, open S-01B powered grooming tower with internal 120 V outlets holding hairdryer and toothbrushes off the counter, south basin, S-01A south tower), with the flush walnut WC portal and north soaking tub alcove at left.

03 CAMERA KEY PLAN

Sightlines on plan ID-01

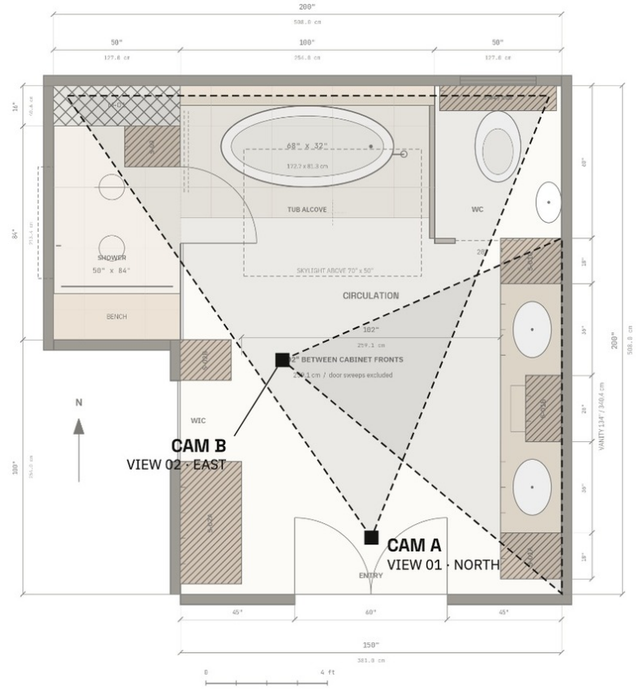

04 DESIGN EXPLANATION

Brief section 8.C

01 **CORE IDEA — TRAVERTINE & WALNUT**
Replaces the diagonal corner platform and fragmented cabinetry with three materials used throughout: honed Roman travertine slabs, quarter-sawn fluted American black walnut and brushed champagne bronze.

02 **DAILY USE & CIRCULATION**
Removes the 2-step tub platform for a level, radiant-heated wet zone under the existing skylight. The 50"×60" shower becomes a 50"×84" enclosure with an 18" heated bench, and 102" (8'-6") stays clear between the vanity and west cabinet fronts.

03 **STORAGE — 136.78 FT³ CONCEALED**
Hairdryer, toothbrushes and shavers stay plugged into 120 V GFCI outlets inside the S-01B tower. Hampers, bath sheets and full-height vacuum and mop storage sit behind the 24"-deep S-02 west wall. Volumes are internal envelopes before shelves and hardware.


04 **PLUMBING, MECHANICAL & WINDOWS**
WC (pan centre X=125", Y=176") and east vanity drain wall stay in place: 0" relocation. Option A converts to a tankless heater in a 50"×16" chase to lengthen the shower to 84"; fuel, venting and sizing to be confirmed by the plumber. Option B keeps the 50"×40" utility closet footprint unchanged. Skylight and north / west windows are retained with privacy glazing or shutters.

PROJECT	DRAWING	SCALE	DATE	REV	SHEET
MASTER BATHROOM RENOVATION (243 SQ FT)	3D VIEWS, CAMERA KEY & DESIGN EXPLANATION	NTS (VIEWS)	2026-11-10	A	ID-02

INTERIOR WALL ELEVATIONS, CUSTOM MILLWORK SECTIONS & LAYERED LIGHTING

East / West / North / South interior elevations · S-01 and S-02 millwork sections · imperial + metric dimensions · 96" (243.8 cm) ceiling assumed


FOOTPRINT 35,000 in² · 243.06 ft² · 22.58 m²
SCALE NTS · DIMENSIONS GOVERN

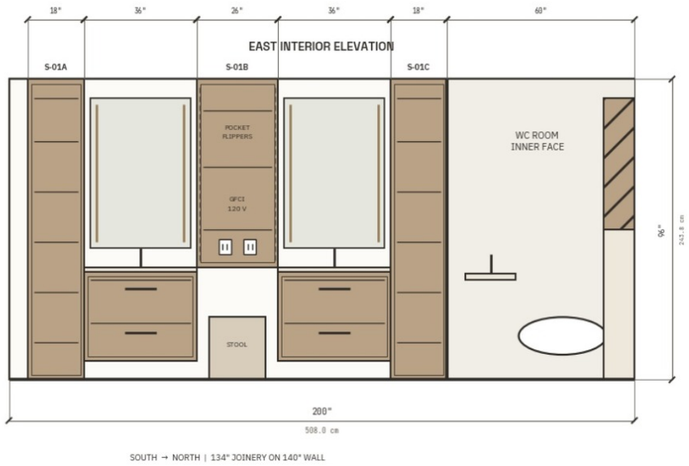


SOUTH → NORTH | 134" JOINERY ON 140" WALL




NORTH → SOUTH | UNFOLDED: X=-50 / X=0

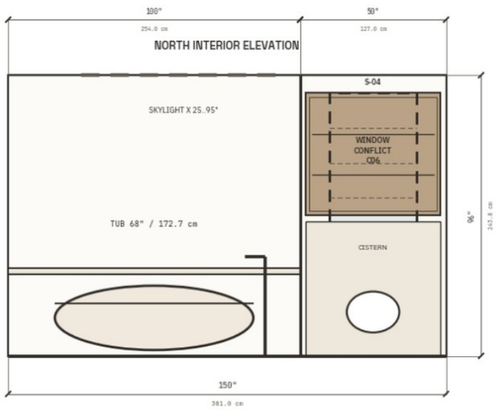


WEST → EAST | NORTH WALL

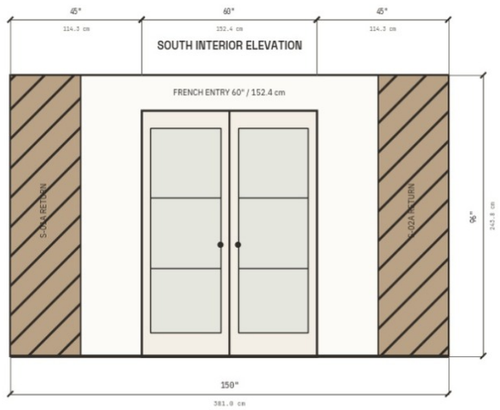

EAST → WEST | SOUTH WALL

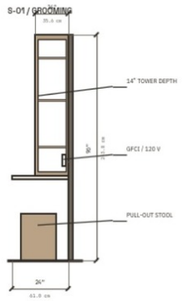

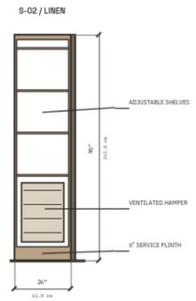

E · EAST — 200" / 508 cm

134" double vanity in five bays: S-01A 18" tower · 36" south basin · S-01B 26" powered grooming tower (internal 120 V GFCI, pocket flippers, pull-out stool) · 36" north basin · S-01C 18" tower. 60" WC room inner face.

W · WEST, UNFOLDED — 200" / 508 cm

M-01 16" tankless chase · 84" walk-in shower with 44" recessed stone niche, 18" heated travertine bench, S-03 heated towel cabinet (Option A) · S-02B 16" robe column · 32" WIC portal · S-02A 48" linen, dual hamper & utility locker.

N · NORTH — 150" / 381 cm

100" wet alcove: 68" freestanding stone tub, 8" full-width travertine ledge, overhead 70"×50" skylight well. 50" WC: wall-hung concealed cistern + S-04 recessed storage.

S · SOUTH — 150" / 381 cm

60" centred double French entry; S-01A and S-02A walnut millwork returns at 45" each side.

SECTIONS — 14" D · 24" D

S-01 grooming tower 14" deep, GFCI at counter zone. S-02 linen / hamper vault 24" deep, ventilated hamper, 6" service plinth.

Field verification items prior to shop drawings: WC door hardware selection, S-04 recess depth relative to north window sill, and partition framing build-up.

01 · CUSTOM MILLWORK & HARDWARE SPECIFICATION — S-01 – S-04

ITEM	SPECIFICATION
Carcass	Marine-grade birch plywood; quarter-sawn American black walnut veneer; solid fluted walnut stiles
Countertop	2" mitered honed Roman travertine slab with integral drip groove; undermount basins
Electrical	2× recessed 20 A GFCI quad circuits, inside S-01B and S-02A
Hardware	Blum Legrabox soft-close full-extension runners; concealed pocket flipper doors; knurled bronze pulls

02 · FOUR-LAYER ARCHITECTURAL LIGHTING SCHEDULE — CCT · CRI

TAG	LAYER	SOURCE / INTENT
L-01	**Daylight**	Existing 70" × 50" overhead skylight well; frosted architectural window shutters
L-02	**Ambient cove**	2700 K CRI 97+ concealed linear LED, perimeter drop-ceiling and skylight-well grazing
L-03	**Task · vanity**	3000 K CRI 97+ vertical edge-lit vanity mirrors for shadow-free facial light
L-04	**Accent · night**	2400 K IP67 recessed niche grazing; 1% dimmable motion-activated toe-kick path to WC

03 · WATERPROOFING, ACOUSTICS & VENTILATION — WET ZONE

ITEM	SPECIFICATION
Membrane	Schluter Kerdi, continuous across 100" × 52" tub alcove and 50" × 84" shower
Threshold	Zero-threshold shower entry; 2% (¼"/ft) floor fall to linear drain
Exhaust	Dual-speed inline fan, < 0.5 sone, grilles in shower and WC ceiling soffits
Verify	Slab recess, drain and duct routes, fan sizing on site survey

PROJECT	DRAWING TITLE	SCALE	DATE · REV	SOURCE	SHEET
LUXURY MASTER BATHROOM · 243 FT²	Interior elevations · millwork sections · lighting & wet-zone schedule	NTS · in / cm	2026-11-10 · 01	DXF R2010	ID-03

TACTILE MATERIAL PALETTE, CONSTRUCTABILITY AUDIT & OPTION B ZERO-MECHANICAL-CHANGE LAYOUT

Finish schedule · plumbing / mechanical comparison against the existing room · cost drivers · CAD deliverables

OPTION A 136.78 ft³ · OPTION B 124.46 ft³
STORAGE · INTERNAL ENVELOPE ESTIMATE

MATERIAL PALETTE · STUDIO FLATLAY

FINISH TAGS 01–06



01 Honed Roman travertine — floor, wet walls & 2" vanity slab

02 Quarter-sawn fluted American black walnut — S-01 to S-04 millwork

03 Brushed champagne bronze PVD — faucets, filler & knurled pulls


04 Low-iron architectural & reeded privacy glass

05 Warm ivory mineral limewash plaster #F4EFE6


06 Organic waffle-weave linen & cotton

EXISTING SKETCH & WALKTHROUGH PLAN vs. OPTION B — ZERO-MECHANICAL-CHANGE LAYOUT

N ↑

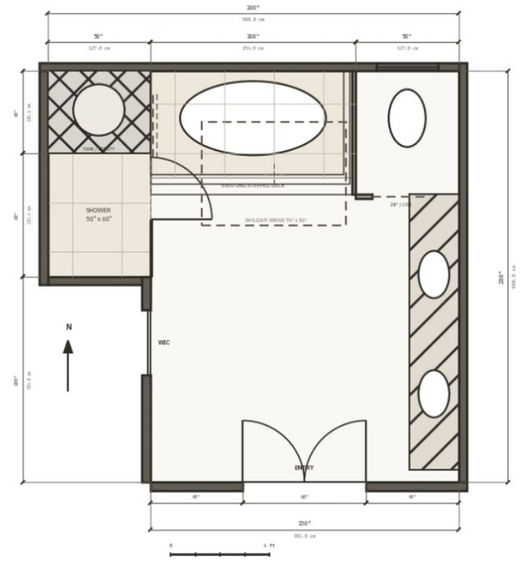

EXISTING
Raised 2-step corner tub deck, 50" × 60" shower and 50" × 40" tank / utility closet in the west wing; vanity on the east wall; WC in the NE corner.

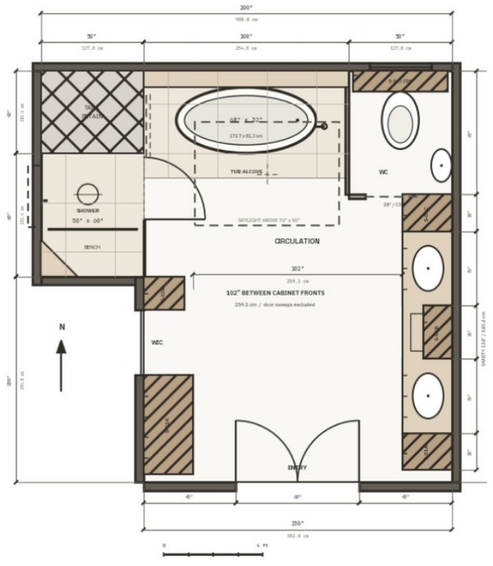

OPTION B
Same S-01 134" vanity, S-02 west linen wall and 68" freestanding tub; 50" × 40" mechanical closet untouched; 50" × 60" shower retained.

01 · CONSTRUCTION PRACTICALITY & PLUMBING / MECHANICAL MATRIX

BRIEF §4 & §7

ELEMENT	EXISTING (SKETCHES & WALKTHROUGH)	OPTION A — PRIMARY TANKLESS CHASE + 50" × 84" SHOWER	OPTION B — CONSERVATIVE UTILITY UNTOUCHED + 50" × 60"
Toilet stack	NE corner, stack point (125, 182)	0" move; wall-hung pan on carrier	0" move; as Option A
Vanity drains	East wall	0" move; two basins on east wall	0" move
Tub drain	Raised 2-step corner deck	Within existing NW 100" × 60" wet zone; step platform removed	As Option A
Shower drain	West wing, 50" × 60"	Within west wing; zone extended to 50" × 84", linear drain	Within existing 50" × 60" wing
Water heater	Tank in 50" × 40" closet	Wall-hung tankless in 50" × 16" chase; frees 50" × 24" floor	No mechanical relocation
Structure	Exterior walls, skylight	No exterior wall or skylight change; interior partitions only — bearing status to be confirmed on site	

02 · COST DRIVERS & VALUE-ENGINEERING NOTES

NO PRICING · SCOPE ONLY

CATEGORY	ITEMS
PRIMARY INVESTMENT	Custom fluted walnut millwork walls S-01 / S-02 · demolition of raised corner tub deck · wet-zone slab waterproofing with radiant floor · optional tankless water-heater upgrade (Option A only)
COST SAVING	Existing skylight retained · WC stack retained · east vanity plumbing wall retained · south entry and west WIC door openings retained · Option B leaves the mechanical closet as is

03 · DELIVERABLE & CAD VERIFICATION MANIFEST

exports/

FILE	FORMAT · CONTENT	SIZE
Master_Bathroom_243sqft_Proposal.dxf	AutoCAD DXF R2010, inches · 79 native dimensions · 15 layers · audit 0 errors	300 KB
Master_Bathroom_243sqft_Proposal.dwg	DWG R2000 companion · annotations as vector outlines; edit text in DXF	3.3 MB
layout_geometry.json	All coordinates in / cm, storage arithmetic, coordination holds	49 KB
Luxury_Bathroom_243sqft_Submission_A3.pdf	4-sheet A3 portfolio, ID-01 to ID-04	A3 × 4

04 · STORAGE SCHEDULE · OPTION A vs. OPTION B

INTERNAL ENVELOPE, BEFORE SHELVES & HARDWARE

GROUP	BASIS	A · ft³	B · ft³	A · L
S-01	Two 16 × 22 × 88" towers · four U-drawers · grooming tower	56.02	56.02	1,586
S-02	Utility locker · dual hamper · linen · robe column	60.70	60.70	1,719
S-03	Heated towel cabinet in shower wing (Option A only)	12.31	—	349
S-04	Over-cistern & side-wall recessed WC storage	7.74	7.74	219
TOTAL	**Verified internal cabinet envelopes (+ 44" shower niche)**	**136.78**	**124.46**	**3,873**

Existing conditions are read from the supplied sketches and walkthrough video, not a measured survey. Tankless sizing, venting and fuel / electrical supply (Option A), slab recess and drain positions are confirmed by a licensed trade before fabrication.

PROJECT	DRAWING TITLE	SCALE	DATE · REV	SOURCE	SHEET
LUXURY MASTER BATHROOM · 243 FT²	Material palette · constructability matrix · Option B · deliverables	NTS · in / cm	2026-11-10 · 01	DXF R2010	ID-04